
versatile™ 4C Mailbox, 4CADD-08

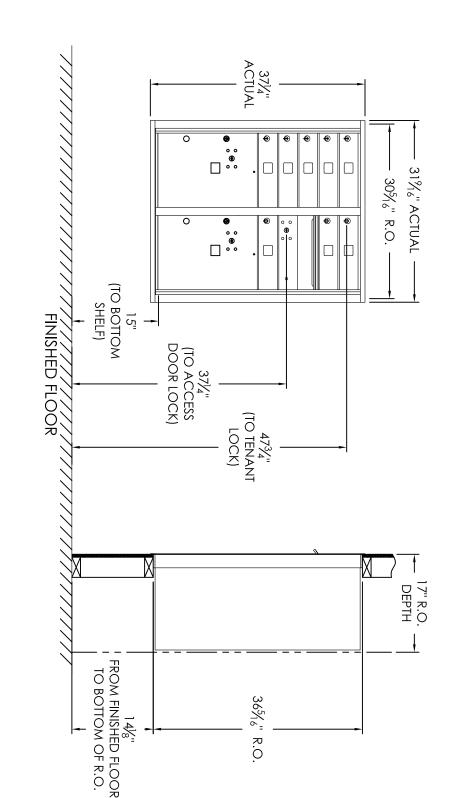

COMPARTMENT CHART

DESCRIPTION	COMPARTMENT	COMPARTMENT SIZE	QTY.
MAILBOX	MB1	3" H x 12" W x 15" D	8
OUTGOING MAIL	OM2	6" H x 12" W x 15" D	_
PARCEL	PL5	17" H × 12" W × 15" D	2

Notes:

- 1. This module meets the USPS STD-4C requirements for installation defined below when the mailbox is installed per the dimensions provided on this drawing.
- At least one customer compartment shall be positioned less then 48" above finished floor (AFF). No parcel locker (interior bottom shelf) shall be positioned less than 15" AFF.
- No patron (tenant) lock shall be positioned more than 67" AFF.
- No customer compartment (interior bottom shelf) shall be positioned less than 28" AFF.
- e. The USPS Arrow lock shall be positioned 36"- 48" AFF.
- ωΝ This 4C mailbox can also be used for private applications.
- The rough opening width for multi-unit 4C installations = (the sum of all actual unit widths) 1%".

PRODUCT SERIES: VERSATILETM 4C FRONT LOAD MAILBOX

www.florencemailboxes.com • (800) 275-1747 5935 Corporate Drive • Manhattan, KS 66503 | DRAWING NUMBER A GIBRALTAR INDUSTRIES COMPANY manutacturing co

ompany		
NON	SCALE NION	MODEL 4CADD-08
	E LAS)-08 REV
5/15/2014	T REV DAT	В

4CADD-08CS DRAWN BY S 모